

Quickshifter sensor for Triumph

**Daytona 675, Street Triple from VIN 411984,
Street Triple R from VIN 411984, Street Triple S,
Street Triple S 660cc, Street Triple R LRH**

**Shifter
France**
www.shifter-france.com

Thank you for choosing "Shifter France"



www.Shifter-France.com

1) Remove the wire clips retaining the original gear selector rod front and rear ball joints, as shown on pic. 1.



2) Screw sensor with rear ball joint (it has right-hand thread) with no space.

3) Screw front ball joint with rod.

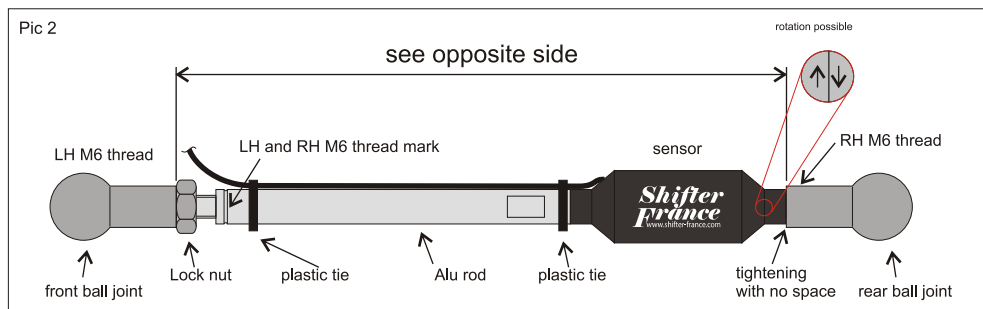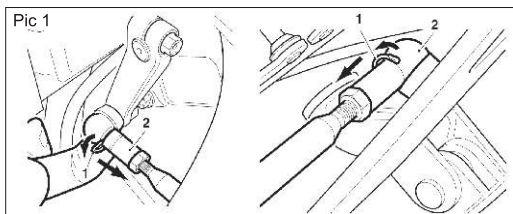

Location of QS sensor connector:

Daytona 675 to VIN 564947 - under the main harness connectors for the ECU

Street Triple to VIN 560476 and Street Triple R to VIN 560476 - under the fuse box

Street Triple S, Street Triple S 660cc, Street Triple R from VIN 793032,

Street Triple R LRH - on a bracket below the fuel tank on the right hand side of motorcycle

Daytona 675 from VIN 564948, Street Triple from VIN 560477 and Street Triple R from VIN 560477 to VIN 793031 - next to the breather cover


Operation instruction

- Due to the competition nature of the Quickshifter, it is necessary to use a 'positive' pedal force to ensure a smooth gear change.
- The Quickshifter assembly will trigger a momentary engine cut to allow the gear to engage, without closure of the throttle or operation of the clutch.
- The Quickshifter will not operate if the clutch is applied.
- The Quickshifter will only operate for up-changes, the clutch must be used for down-changes.
- The Quickshifter will only operate at engine speeds greater than 2,500 rpm.
- Use the clutch when selecting first gear from neutral. The Quickshifter will not operate when changing from neutral to first gear.
- The Quickshifter will not operate when in 6th gear if an up-change is attempted by mistake.


Quickshifter sensor for Triumph

Daytona 675,
Street Triple from VIN 411984,
Street Triple R from VIN 411984 up to VIN 793031

Use short bolt (20mm) for connect sensor and ball joint.



1:1

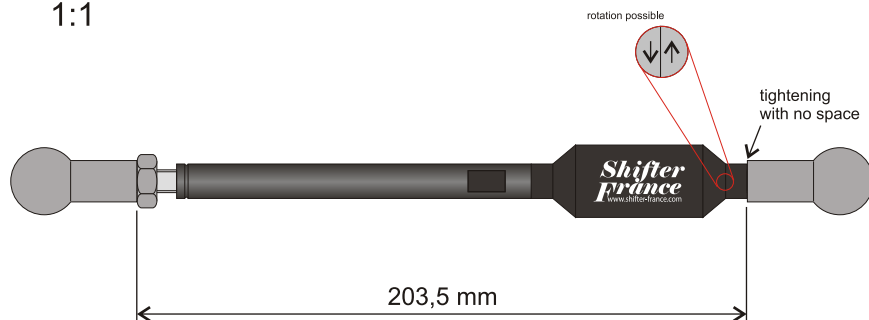

Street Triple S, Street Triple S 660cc, Street Triple R from VIN 793032,
Street Triple R LRH (Low Ride Height)

Use long bolt (25mm) and nut for connect sensor and ball joint.



1:1

